

XMT® 650 Series

Multiprocess
Welding System 

QUICK SPECS

Heavy Industrial Applications

- Fabrication and construction
- Structural steel fabrication/erection
- Heavy manufacturing
- MRO — maintenance/repair
- Pressure tank/vessel fabrication
- Shipbuilding
- Refineries and foundries
- Railcar manufacturing
- Earth-moving equipment manufacturing

Processes

- MIG (GMAW)
- Flux-cored (FCAW)
- Stick (SMAW)
- DC TIG (GTAW)*
- RMD@**
- Pulsed MIG (GMAW-P)**
- Submerged arc (SAW)*
- Air carbon arc (CAC-A) cutting and gouging
- Rated: 3/8-inch carbons
- Induction heating***

Input Power 380/460 V or 575 V, 50/60 Hz, 3-phase power

Output Range 10–815 A, 10–65 V

Rated Output 650 A at 44 VDC, 100% duty cycle

Net Weight 159 lb. (72.1 kg)

ArcReach® (recommended option)

Remote voltage control without a control cord

**Not available with Polarity Reversing model.*

***XMT 650 ArcReach models with ArcReach Smart Feeder only.*

****XMT 650 ArcReach models with ArcReach Heater only.*



Game-changing welding technologies can stop you from wasting hours every day.

ArcReach welding technology minimizes the non-value-added time spent walking to and from the power source — and maximizes arc-on time, weld quality and jobsite safety.

When operators have complete control at the feeder or remote — even hundreds of feet away from the power source — it minimizes downtime and maximizes productivity, while improving operator safety and delivering high quality welds.



Next Level Productivity



Next Level Cost Savings



Next Level Power



ArcReach®

Remote voltage control at the wire feeder or remote without a control cord. See page 2 for more information.

XMT 650 CC/CV (non-ArcReach model)

Ideal for

- Heavy manufacturing and fabrication with traditional feeders/accessories

XMT 650 ArcReach System

Ideal for

- Structural steel fabrication
- General construction
- Shipbuilding

XMT 650 ArcReach PR System (polarity reversing)

Ideal for

- Structural steel erection



Power source is warranted for three years, parts and labor.



Miller Electric Mfg. LLC
An ITW Welding Company
1635 West Spencer Street
P.O. Box 1079
Appleton, WI 54912-1079 USA

Equipment Sales US and Canada
Phone: 866-931-9730
International Phone: 920-735-4554

MillerWelds.com



XMT® 650 ArcReach® System Benefits



Next Level Productivity

ArcReach® capabilities eliminate the time spent tracing weld cables hundreds of feet back to the power source because weld operators can make adjustments at the ArcReach wire feeder or remote.

- **Cable Length Compensation (CLC™)** ensures that the voltage a weld operator sets is the voltage they get by automatically adjusting voltage based on weld cable length, even hundreds of feet away from the power source.
- **Process selection at point of use** to easily switch between welding and gouging with an ArcReach wire feeder or remote.
- **Return to a previous weld process faster** because the power source is restored to its previous settings once the ArcReach accessory is removed.
- **Decrease the chance of an incorrect weld process used** because Auto-Process Select™ automatically sets the power source to the correct weld process based on the polarity applied to the weld accessory.
- **ArcReach 16 shop cart** option with caster wheels and handle makes it easy to transport the wire feeder across the shop and under I-beams.
- **ArcReach 16 field roller** option is equipped with rollers to make it easier than ever to pull an ArcReach 16 wire feeder across pan decking.



Next Level Cost Savings

Maximize savings by simplifying your fleet and accessories, being ready-to-weld with preassembled wire feeders, eliminating inefficiencies, and minimizing equipment downtime with XMT 650 ArcReach systems.

- **Eliminate the control cable** and reduce inventory and maintenance expense with ArcReach.
- **Eliminate dedicated gouging power sources** with integrated gouging stud at the wire feeder.
- **Eliminate cart/sled custom design and assembly** and be ready-to-weld in minutes with a preassembled ArcReach 16 wire feeder.
- **Enable welder with full control at point of use**, increasing efficiency.
- **Adjust While Welding (AWW™)** allows weld operators to change weld parameters while the arc is on.
- **Rugged and durable** means equipment lasts — with IP23 rating, Wind Tunnel Technology™ and Fan-On-Demand™.



Next Level Power


Power for all your welding and gouging needs.

- **Field-proven gouge process.** Remove more material per pass with optimized gouge process without sacrificing control.
- **Weld power to meet productivity needs.** Improve your project timelines with the ability to use large diameter filler wires and minimize downtime with large spools.
- **Elevated arc performance across jobs.** Provides the ability to run a vast range of wire diameters with ideal power. Enables flexibility without sacrificing performance.
- **Rack option** houses four XMT 650 power sources in one convenient package for multiple operators.

ArcReach®

Remote control of the power source without a cord.

ArcReach technology uses the existing weld cable to communicate welding control information between the feeder or remote and power source. This technology eliminates the need for control cords, and their associated problems and costs.

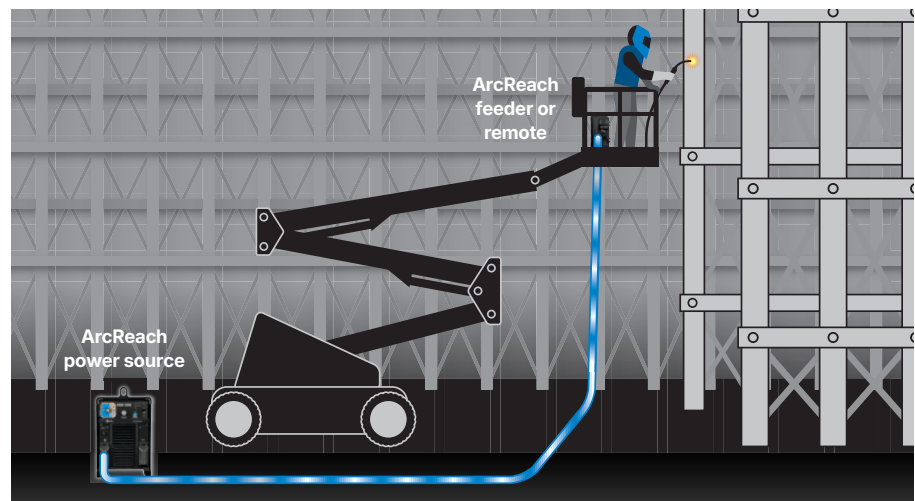

XMT® 650 Series Features



Remote in use indicator on front panel provides convenient feedback indicating an ArcReach® wire feeder or a compatible 14-pin device is controlling the power source. While under ArcReach control, process and voltage/amperage adjustments are locked out, preventing accidental changes by personnel other than the welding operator.

Auto Remote Sense™ enables unit to automatically use remote control if connected to remote control receptacle.


14-pin receptacle has the flexibility to be used with spool guns, feeders, and remote controls.

Arc control is active in the stick and solid-wire processes. It allows the operator to customize arc characteristics to match preference, electrode and joint design from a softer arc with more fluid puddle to a stiffer arc with a more controllable puddle. The Star setting is optimized for most applications and pointing the control at Soft or Stiff is optimal for most arc preferences. Control is fully adjustable from 0 to 25 Soft or 0 to 25 Stiff.



120-volt auxiliary power (except ArcReach polarity reversing model) provides 15 amps of power to run power tools — like grinders, chop saws, drills and lights.


XMT® 650 CC/CV and ArcReach® Process Control

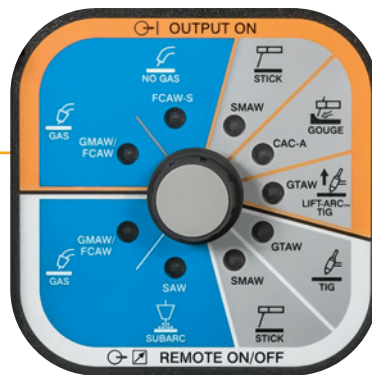

LED process indicator. Front panel process selections are illuminated with an LED that identifies the active process. This enables the selected weld process to be seen at a distance from the power source.

- Gouging mode is an optimized stick position for better gouging performance
- Three wire modes (GMAW/FCAW/SAW) for simplified setup and optimized arc performance
 - Solid and flux-cored wires with gas
 - Flux-cored (self-shielded)
 - Sub arc
- Stick mode for all electrode types
- Lift-Arc™ TIG

XMT® 650 ArcReach® PR (Polarity Reversing) Process Control

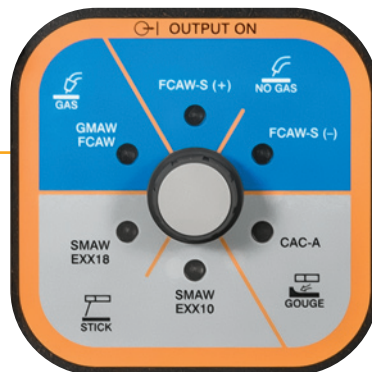

Easy to use. Streamlined and simplified to reduce setup time and potential weld defects. Process changeover eliminates the need for swapping cables. The robust design withstands harsh environments common in the field.

LED process indicator. Front panel process selections are illuminated with an LED that identifies the active process. This enables the selected weld process to be seen at a distance from the power source.

- Gouging mode is an optimized stick position for better gouging performance
- Two wire modes (GMAW/FCAW) for simplified setup and optimized arc performance
 - Solid and flux-cored wires with gas
 - Flux-cored (self-shielded)

XMT® 650 Series Specifications (Subject to change without notice.)




AMPERAGE/VOLTAGE RANGES	RATED OUTPUT	AMPS INPUT AT RATED LOAD OUTPUT, 50/60 HZ					MAX. OPEN-CIRCUIT VOLTAGE	DIMENSIONS	NET WEIGHT
		380 V	460 V	575 V	KVA*	KW*			
10–815 A in CC mode	650 A at 44 VDC, 100% duty cycle	51.5	42.6	35.2	33.9 (35.3)	31.9 (31.7)	82	H: 28.187 in. (716 mm) (including lift eye) W: 16.687 in. (424 mm) D: 31.625 in. (803 mm)	159 lb. (72.1 kg)
10–44 V in CV mode	750 A at 44 VDC, 60% duty cycle	59.9	49.1	41.1	39.5 (41.0)	37.0 (37.4)			
10–65 V in SAW mode*	815 A at 44 VDC, 25% duty cycle	65.3	53.6	44.3	43.0 (44.2)	40.2 (40.5)			


*Not available with polarity reversing model. **Values in parentheses are for 575 V.

Certified by Canadian Standards Association to both the Canadian and U.S. Standards.

Performance Data



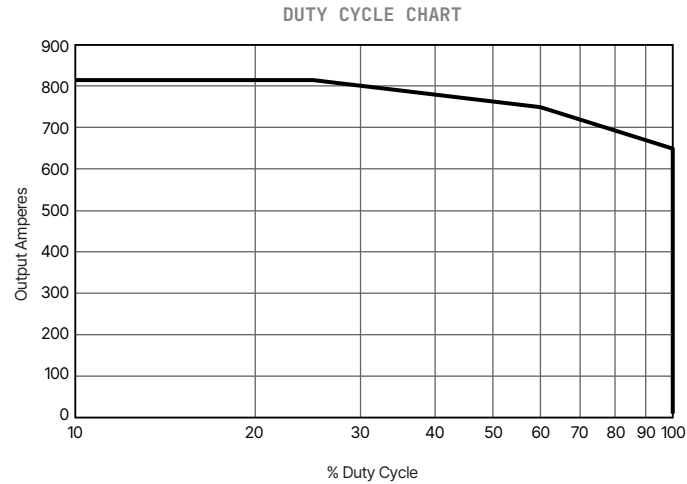


Mounting Specifications

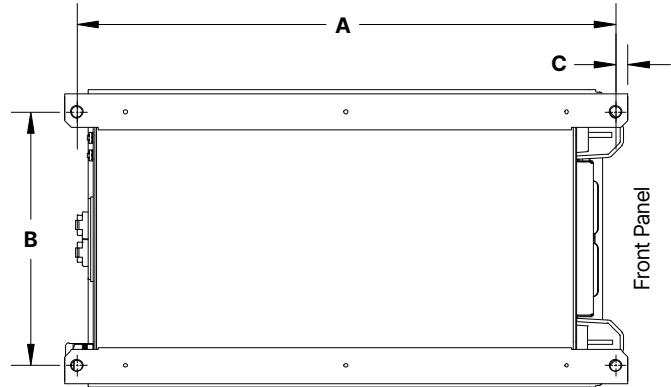

Typical Installation and Hookups

MIG/FCAW installation diagram

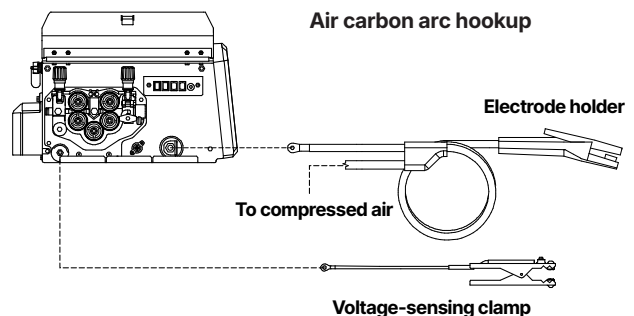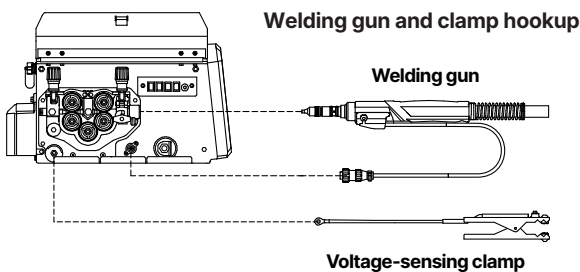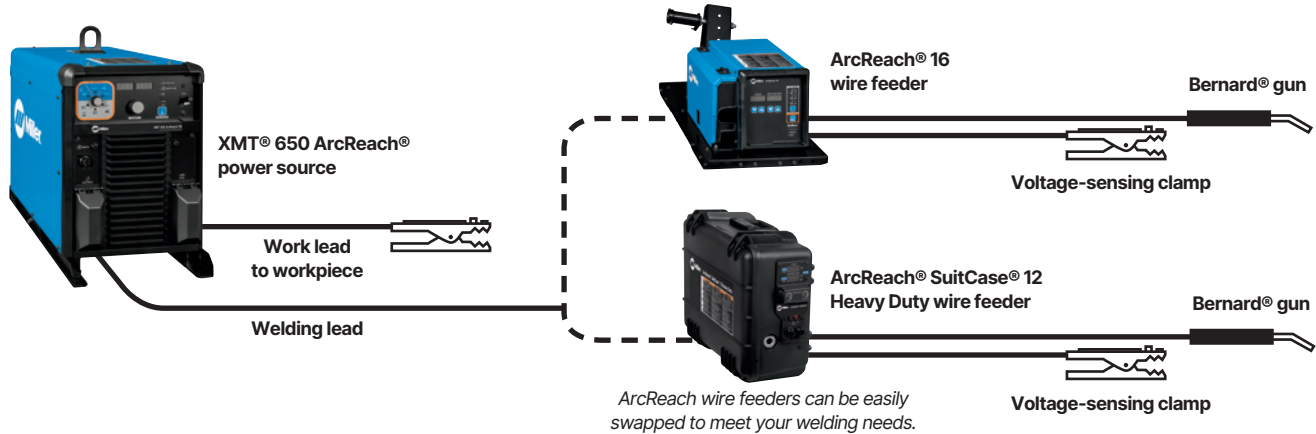

ArcReach® Heater System



Take charge of your field preheat and bakeout applications up to 600 degrees Fahrenheit (315°C).

As part of the ArcReach technology platform, the heater is an accessory for select ArcReach welding power sources. The induction heating tools (air-cooled cables or air-cooled quick wraps) connect to the ArcReach Heater, which is powered by select on-site welding power sources.

ArcReach Heater Packages

951848 ArcReach Heater CSA model and extension cable

951849 ArcReach Heater CSA model, extension cable and two air-cooled quick wraps

ArcReach Heater Only

301390 CSA model

301591 CE model

The ArcReach Heater is equipped with built-in temperature control allowing for either manual or computer-loaded programming using up to six thermocouples. The ArcReach Heater can run either one or two heating tools (air-cooled cable or air-cooled quick wrap) simultaneously. Requires ArcReach Heater extension cable to operate. See literature IN/16.0.

Note: Weld cables are not included.

ArcReach Heater systems allow economical, insourced weld preheating and bakeout. With ArcReach Heater systems you can:

- Eliminate the costly overruns common with heating contractors
- Eliminate delays due to transitions between heating and welding crews
- Run your own schedule without depending on third-party contractors
- Use existing on-site welding equipment up to 200 feet away as the heating power source
- Lower preheating and bakeout costs
- Automatically and accurately document joint temperatures
- Eliminate safety concerns caused by traditional resistance and open-flame heating

The ArcReach Heater air-cooled induction heating system is specifically designed for preheating and bakeout applications up to 600 degrees Fahrenheit (315°C), without the need for a cooler and coolant. Preheat and bakeout programs can be manually entered or loaded via USB drive. Heating data is automatically recorded and can be used in quality control and documentation needs.

The air-cooled cables and quick wraps are manufactured from durable high-temperature materials, and designed for both industrial and construction applications.



ArcReach Heater Extension Cable

301451 10 ft. (3 m)

Air-cooled cables or quick wraps connect to the side of the box. Up to six thermocouple sensors connect to the yellow panel, and provide temperature feedback from the piece being heated.



Air-Cooled Quick Wrap 301452

The quick wrap works on pipe up to 10-inch (25.4 cm) diameter, and can heat up to a maximum of 600 degrees Fahrenheit (315°C). Requires preheat insulation for temperatures over 392 degrees Fahrenheit (200°C) to protect the tool. Most joints will require simultaneous use of two-air cooled quick wraps — one on each side of the joint.



Preheat Insulation with Cable Harness

301334 1/2 x 16 x 120 in. (1.3 x 41 x 305 cm) Air-cooled heating cable coils of various sizes can be attached directly to this preheat insulation. Once a coil is set up it can easily be moved from part to part reducing setup times. The insulation is 10-feet (3 m) long and can be cut to length to fit your application.

Note: Heating cable not included.

High-Temperature Rope 194965

1-inch (2.5 cm) wide, 50-foot (15.2 m) roll.

ArcReach® Heater Specifications (Subject to change without notice.)

INPUT POWER	AMBIENT TEMPERATURE RANGE		RATED OUTPUT	DIMENSIONS	NET WEIGHT
	STORAGE	USAGE			
Operates on open-circuit voltage: 50–70 V	-4–131°F (-20–55°C)	14–104°F (-10–40°C)	7.8 kW at 100% duty cycle	H: 18.6 in (472 mm) W: 11.2 in (285 mm) D: 26.7 in (678 mm)	43 lb. (20 kg) CSA 50.5 lb. (23.4 kg) CE

Certified by Canadian Standards Association to both the Canadian and U.S. Standards.

Manufactured and certified in accordance with IEC-60974-1, -10.

Genuine Miller® Accessories



XMT® 650 ArcReach® 4-Pack Racks

907860 380/460 V

907913 575 V

907852 380/460 V, with polarity reversing

301754 Empty rack (order fuses separately)

Occupied racks come assembled with four XMT 650 ArcReach power sources fused for 460 volts (575 V model fused for 575 V).

Features include:

- Provision to parallel power sources on common work connections
- Two lifting eyes for transportation
- Rugged skids for dragging or pushing



Running Gear Cylinder Rack 300408

Small footprint and easily maneuverable, with cylinder rack low enough that you do not have to lift bottles.



ArcReach® Stick/TIG Remote 301325

When paired with an ArcReach power source, provides remote control of the

power source without a cord — saving time and money. See literature AY/14.5.



Industrial MIG 4/0 Kit 300390

Consists of flowmeter regulator with 10-foot (3 m) gas hose, 10-foot (3 m) 4/0 feeder weld cable with lugs, and 15-foot (4.6 m) work cable with 600-amp C-clamp.

Adapter Cord 301259

115-volt cord for legacy 14-pin accessories. Required to connect to legacy accessories.



14-Pin to SubArc Digital Converter 301578

Enables you to use digital SubArc interfaces and accessories with engine-driven

welders and 14-pin power sources for one all-inclusive SubArc solution. SubArc Digital interfaces offer reliability, flexibility, and performance with their ability to interface with DC, CC/CV power sources having remote contactor and output control capabilities.

Wire Feeders/Guns



ArcReach® 16

301619 Base feeder (not shown)

301664 With shop cart

951000065 With shop cart and Bernard® BTB Gun 500 A

301663 With field roller

951000066 With field roller and Bernard® IronPro™ flux-cored gun

Portable wire feeder for shop or field use accommodating a variety of wires up to 3/32-inch diameter. When paired with an ArcReach power source, provides remote control of the power source without a control cord — saving time and money. See literature M/6.55.



ArcReach® SuitCase® 12 Heavy Duty

301604 Feeder only

951000096 With Bernard® IronPro™ flux-cored gun

For 3/32-inch cored wire.

Portable feeder designed to run off of arc voltage. When paired with an ArcReach power source, provides remote control of the power source without a control cord — saving time and money. See literature M/6.55.



ArcReach® SuitCase® 8

951726001 With Bernard® BTB Gun 300 A

951728 With Bernard® Dura-Flux™ gun

ArcReach® SuitCase® 12

951729001 With Bernard® BTB Gun 300 A

951731 With Bernard® Dura-Flux™ gun

Portable feeder designed to run off of arc voltage. Includes BTB Gun with AccuLock™ consumables, or Dura-Flux™ gun with Centerfire™ consumables. When paired with an ArcReach power source, provides remote control of the power source without a control cord — saving time and money. See literature M/6.55.



ArcReach® Smart Feeder

951733

With drive rolls, Bernard® PipeWorx 300-15 MIG gun and Tweco-style connectors

300935

Feeder only w/Tweco-style connectors

300935001

Feeder only w/Dinse-style connectors

For use with ArcReach models only. For MIG, FCAW, and advanced RMD® and pulse processes. See literature M/6.55.

XMT® 650 Smart Feeder Compatibility Kit 400052

Compatibility kit required before serial number NF390606C. Software must be at 1.17 or higher to be used with the XMT® 650 with software revision 291134H or higher. Updated software can be downloaded from MillerWelds.com.



SuitCase® 12RC 951580001

Lightweight, portable wire feeder for a variety of wires up to .062-inch diameter. Holds up to a 12-inch spool of wire. Includes remote voltage control, drive roll kit

and Bernard® BTB Gun 300 A with AccuLock™ consumables. See literature M/6.5.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.

Genuine Miller® Accessories

Wire Feeders/Guns (cont.)



XR-AlumaFeed® SuitCase® 301567

Advanced push-pull wire feeder designed for high-volume, high-production aluminum MIG welding where quality and consistency is a high priority. See literature DC/34.0.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.



74 MPa Plus

S-74 MPa Plus 951291001

D-74 MPa Plus 951292001

Heavy-duty industrial feeder with features for weld control and programs, plus push-pull aluminum capabilities. Handles a variety of wires up to 5/64 inch. Includes Bernard® BTB Gun 400 A with AccuLock™ consumables. Works synergically with MPa power sources. See literature M/3.0.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.



20 Series

Basic 951779001

Digital 951780001

Simple and cost-effective industrial feeders. Digital model adds digital meter, remote voltage control and adjustable run-in control. Handles a variety of wires up to 5/64 inch. Includes Bernard® BTB Gun 400 A with AccuLock™ consumables. See literature M/11.0.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.

Extension Cables

247831025 25 ft. (7.6 m)

247831050 50 ft. (15.2 m)

247831080 80 ft. (24.4 m)

Eleven conductors to support contactor control and remote voltage control on all Miller® electronic CV 14-pin power sources. Additional functions supported when using MPa power sources include synergic pulsed MIG, remote process select and side select capabilities.



Spoolmatic® 30A 130831

One-pound, air-cooled spool gun that extends the weld process range by adding

a handy portable system for small wire MIG. Rated at 200 amps at 100 percent duty cycle. Includes 30-foot (9.1 m) cable assembly. Requires WC-24 Weld Control **137549** for use with 14-pin receptacles, order separately.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.



WC-24 Weld Control 137549

Required to use Spoolmatic 30A spool gun. Designed for use with Miller CV power sources with 14-pin receptacles and supplying 24 VAC.

Note: Not compatible with XMT 650 ArcReach polarity reversing model.

Remote Controls



Wireless Remote Foot Control 301580

For remote current and contactor control. Receiver plugs directly into the 14-pin receptacle of Miller machine. 90-foot (27.4 m) operating range.



Wireless Remote Hand Control 301582

For remote current and contactor control. Receiver plugs directly into the 14-pin receptacle of Miller machine. 300-foot (91.4 m) operating range.



RFCS-14 HD Foot Control 301589

Heavy-duty foot pedal current and contactor control provides increased stability and durability from larger base and heavier cord.

Includes 20-foot (6 m) cord with plug.



RHC-14 Hand Control 242211020

20-foot (6 m) cord

242211100

100-foot (30.5 m) cord

Miniature hand control for remote current and

contactor control. Dimensions: 4 x 4 x 3.25 inches (102 x 102 x 82 mm). Includes cord and 14-pin plug.



RCC-14 Remote Contactor and Current Control 151086

East/west rotary-motion fingertip control attaches to TIG torch using two hook-and-loop fasteners. Includes 26.5-foot (8 m) cord and 14-pin plug.



RCCS-14 Remote Contactor and Current Control 043688

North/south rotary-motion fingertip control attaches to TIG torch using two hook-and-loop fasteners. Includes 26.5-foot (8 m) cord and 14-pin plug.

Extension Cables for Remote Controls and 24 VAC Wire Feeders

242208025 25 ft. (7.6 m)

242208050 50 ft. (15 m)

242208080 80 ft. (24.3 m)

14-pin plug to 14-pin socket. Not for use with XR-AlumaFeed® or 74 MPa Plus feeder.

Ordering Information

POWER SOURCE AND OPTIONS	STOCK NO.	DESCRIPTION	QTY.	PRICE
XMT® 650 CC/CV	907843	380/460 V, 50/60 Hz		
XMT® 650 CC/CV Stationary Package	951000067	Includes S-74 MPa Plus feeder with .035/.045 in. reversible V-groove drive rolls, Bernard® BTB Gun 400 A with AccuLock™ consumables, and industrial MIG 4/0 kit (see page 6 for contents)		
XMT® 650 CC/CV MIGRunner™ Package	951000068	Includes stationary package above plus running gear cylinder rack (300408)		
XMT® 650 ArcReach®	907823 907844 907845	380/460 V, 50/60 Hz CE. 380/460 V, 50/60 Hz 575 V, 50/60 Hz		
XMT® 650 ArcReach® PR	907822	380/460 V, 50/60 Hz, with polarity reversing		
XMT® 650 ArcReach® 4-Pack Rack	907860 907913	380/460 V, fused for 460 V, 50/60 Hz 575 V, fused for 575 V, 50/60 Hz See Multioperator Racks literature DC/19.0 for more information		
XMT® 650 ArcReach® PR 4-Pack Rack	907852	380/460 V, fused for 460 V, 50/60 Hz, with polarity reversing See Multioperator Racks literature DC/19.0 for more information		
ArcReach® Heater System		See page 5		
Accessories				
XMT 650 Rack	301754	Empty rack capable of housing four XMT 650 models (order fuses separately)		
Running Gear Cylinder Rack	300408	Small footprint and easily maneuverable		
ArcReach® Stick/TIG Remote	301325	Point-of-use control for stick or TIG welding and gouging		
Industrial MIG 4/0 Kit	300390	See page 6 for contents		
Adapter Cord	301259	115-volt cord for legacy 14-pin accessories — required to connect to legacy accessories		
14-Pin to SubArc Digital Converter	301578	Allows 14-pin power sources to be used with SubArc Digital accessories		
Wire Feeders/Guns				
ArcReach® 16 MIG/FCAW/CAC-A Feeder	301619 301664 951000065 301663 951000066	Base feeder only With shop cart With shop cart, drive rolls and Bernard® BTB Gun 500 A with AccuLock™ consumables With field roller With field roller, drive rolls and Bernard® IronPro™ flux-cored gun with AccuLock™ consumables		
ArcReach® SuitCase® 12 Heavy Duty FCAW Feeder w/Tweco-style connectors	301604 951000096	Feeder only. For 3/32 in. flux-cored wire With drive rolls and Bernard® IronPro™ flux-cored gun with AccuLock™ consumables		
ArcReach® SuitCase® 8 MIG/FCAW Feeder with Tweco-style Connectors	951726001 951728	With drive rolls and Bernard BTB Gun 300 A with AccuLock™ consumables With drive rolls and Bernard Dura-Flux™ gun with Centerfire™ consumables		
ArcReach® SuitCase® 12 MIG/FCAW Feeder with Tweco-style Connectors	951729001 951731	With drive rolls and Bernard BTB Gun 300 A with AccuLock™ consumables With drive rolls and Bernard Dura-Flux™ gun with Centerfire™ consumables		
ArcReach® Smart Feeder MIG/FCAW/RMD/Pulse Feeder	951733 300935 300935001	With drive rolls and Bernard PipeWorx 300-15 MIG gun and Tweco-style connectors With Tweco-style connectors With Dinse-style connectors		
XMT® 650 Smart Feeder Compatibility Kit SuitCase® 12RC MIG/FCAW Feeder with Tweco-style Connectors	400052 951580001	Required before serial number NF390606C. See page 6 for more information With drive rolls and Bernard BTB Gun 300 A with AccuLock™ consumables Not compatible with XMT 650 ArcReach polarity reversing model		
XR-AlumaFeed® SuitCase® Aluminum MIG Feeder	301567	Feeder only. For high-volume, high-production aluminum MIG welding Not compatible with XMT 650 ArcReach polarity reversing model		
74 MPa Plus MIG/FCAW Feeder		See page 7		
20 Series MIG/FCAW Feeder		See page 7		
Extension Cables		See page 7		
Spoolmatic® 30A Spool Gun	130831	Requires WC-24 weld control 137549 for use with 14-pin receptacles		
Bernard® BTB Gun (GMAW)		See Bernard literature SP-BTB		
Bernard® IronPro™ (FCAW)		See Bernard literature SP-IP		
Bernard® Dura-Flux™ (FCAW)		See Bernard literature SP-DF		
Remote Controls		See page 7		

DATE :

TOTAL QUOTED PRICE:

Distributed by:

